

PATTERSON LAMPS

TYPE A.1





**FOR THE MINER**  
Flare Safety Lamp type A.1  
Safety Lamps Approval B112

**TYPE A.1**

Electrically lighted and magnetically unlocked

**CONSTRUCTION :** The bonnet is provided with a male screw ring for attachment to the middle ring. The male screw ring is provided with twenty-four vertical air-inlet holes of total area of 1.18 square inches. Improved burning is secured by an inner chimney of steel which secures proper circulation of air to the flame. The lamp cannot be assembled unless both gaskets are in correct position. The construction is simple and robust ensuring low cost of upkeep.


**LOCKING :** Entirely enclosed and absolutely impregnable. The lock bolt can only be withdrawn by means of a powerful electro-magnet in the lamp-room. Besides locking the oil vessel, the bonnet, gauzes and glass are automatically locked in position.

**LIGHTING :** Correct and certain contact on the Lighting Apparatus is assured both in the lamp room and in the underground neighbors. The electric ignition device is fitted to the side of the lamp and is easily kept clean. This lamp is now made either with or without electric ignition, as desired.

**FILLING :** A spring-loaded oil filling valve is fitted in the top of the oil vessel for filling by a machine to economise on labour in the lamproom.

**LIGHT :** The lamp is fitted with a flat burner and gives over 1 C.P.

Weight—3 lbs. 5 ozs.  
Height to top of bonnet—10½ inches

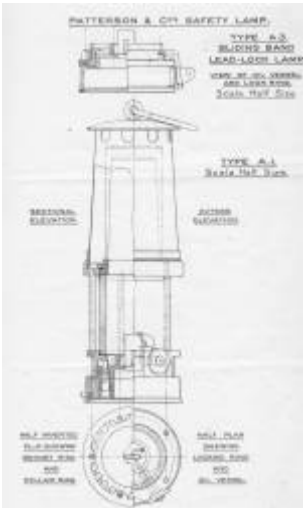




TYPE A.3





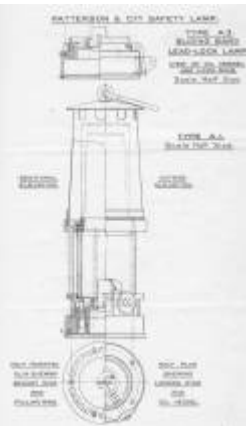



## TYPE B.7

### TYPE B.7

Electrically lighted and magnetically unlocked.

**CONSTRUCTION :** The bonnet is securely fastened to the middle ring. The middle ring is provided with vertical air inlet holes having a total area of 1.6 square inches. Satisfactory burning is ensured by a short chimney of steel which directs the flow of air within the lamp. The burner is encased in porcelain giving a clear flame with low oil consumption. The bottom ring is provided with a female screw thread which engages a glass seating ring and the oil vessel respectively. There are only four pillars between the middle and bottom rings giving the minimum amount of obstruction between the flame and the observer. The lamp cannot be assembled unless both gauges are in their correct position.



This construction represents the maximum of efficiency obtainable with the ordinary Marsaut type of lamp.

**LOCKING:** Entirely enclosed and absolutely impregnable. The lamp can be unlocked only on a powerful electro-magnet in the lamproom.

**LIGHTING :** The Lighting Apparatus is provided with a special locating device which ensures proper contact for lighting.

**FILLING:** A spring loaded oil filling valve is fitted to the top of the oil vessel.

**LIGHT:** The lamp is fitted with a flat burner and the flame is very suitable for gas testing purposes.

Weight—3 lbs. 6 ozs.  
Height to top of bonnet—10½ inches

## TYPE M. IG.



### PATTERSON'S Type M. IG. GAS DETECTING LAMP

Approved by the Ministry of Fuel & Power  
for use by

DEPUTIES  
FIREMEN  
SHOTFIRERS  
and OTHER OFFICIALS

(SCHEDULE 'B' - CLASS B)  
Complying with the Coal Mines S.R. & O.  
of 1938. Nos. 1426, 1427 and 1428

TYPE E.1



TYPE GTL9



---

## TYPE TVI



---


## TYPE H.C.P.



## TYPE H.C.P.9



## Catalog

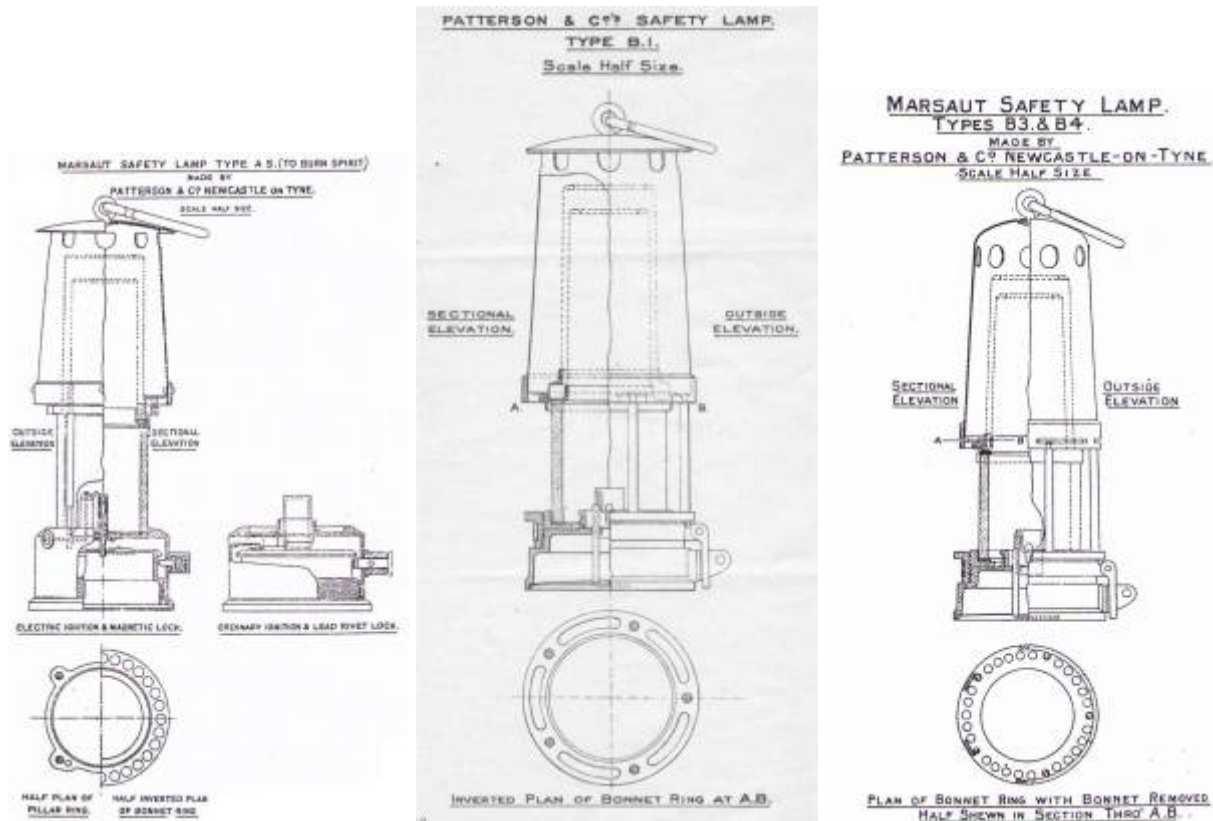

From:  
<https://www.karl-heupel.de/dokuwiki/> - KarlHeupel

Permanent link:  
<https://www.karl-heupel.de/dokuwiki/doku.php?id=grubenlampen:patterson&rev=1402347426>

Last update: 2020/03/26 11:36

